

Monitoring switch OS&Y gate valve | OSYSU




Fig. 1 OSYSU

Physical data | OSYSU

Reference	SPDT Contact Set(s)
OSYSU1a	1
OSYSU2a	2

Application data | OSYSU

Fits most Outside Screw & Yoke (OS&Y) gate valves DN50 (2") to DN300 (12"). Will mount on some OS&Y valves as small as DN15 (1/2"). Refer to the manufacturer's datasheet for detailed mounting instructions.

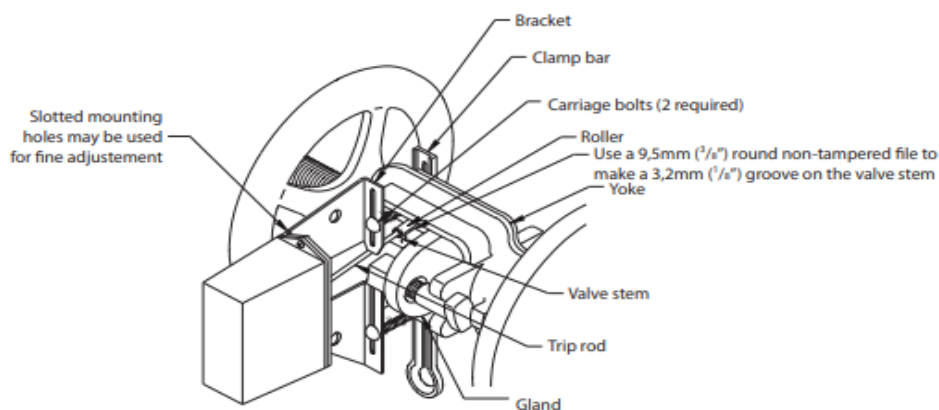

Approvals	  
Dimensions	157 mm (6.19") Width x 77 mm (3") Depth x 144 mm (5.7") Height (rod retracted)
Enclosure	• Cover - Die-cast with red spatter enamel finish • Base - Die cast Zinc
Switch contacts	Available with one or two contact sets of Single Pole Double Throw (SPDT) Form C switch contacts. 10.0 A @ 125/250 VAC and 2.0 A @ 30 VDC
Conduit entrance	Two conduit entrances provided for DN15 /1/2" conduit
Environmental specifications	Indoor or outdoor use ; Temperature Range : -40 °C (-40 °F) to 60 °C (140 °F) ; NEMA 4X and NEMA 6P/IP67 Rated Enclosure - when used with proper conduit fittings. (Not for use in hazardous locations)
Tamper protection	Cover incorporates tamper resistant fasteners that require a special key for removal (reference : VSRFKEY). One key is supplied with each device. A field installable cover tamper switch is available as an option which may be used to indicate unauthorized removal of cover

Uwaga: Niniejszy dokument zawiera jedynie podstawowe informacje o produkcie. Informacje, zdjęcia i rysunki nie są umownie wiążące. We wszystkich przypadkach dokumentem odniesienia jest pełna dokumentacja techniczna producenta (patrz: „Powiązane dokumenty” powyżej). Certyfikaty, sprawozdania z badań oraz aprobaty i dopuszczenia mogą być publikowane w imieniu producenta oryginalnego wyposażenia (OEM). Treść niniejszego dokumentu może zostać zmieniona bez uprzedniego powiadomienia. Wszystkie prawa zastrzeżone.